


COMMERCIAL DOCUMENTATION




REBAR CONNECTION SYSTEM | **PSA-T** **TRANSITION COUPLERS**

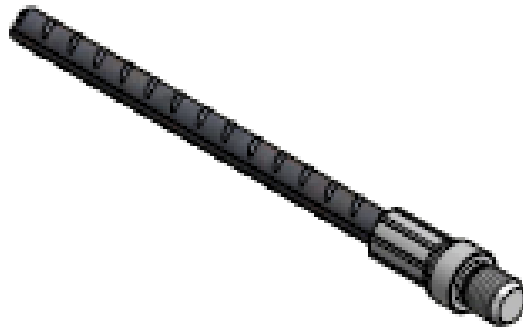

PSA-T TRANSITION COUPLERS

The PSA-T reinforcement coupler consists of reinforcement steel and a special sleeve with interior metric thread pressed on one end. The connection is realised between two rebar with different diameters: the second rebar can be rotated, and its axial direction is not restricted. For the connection with a TSE reinforcement coupler or a PSC bolt and a PSA, the PSA-T coupler ensures uninterrupted reinforcement for all types of precast concrete units.

Other lengths are available on request: **PSA-T – diam. d1/d2 – thread x length (L) in mm.**

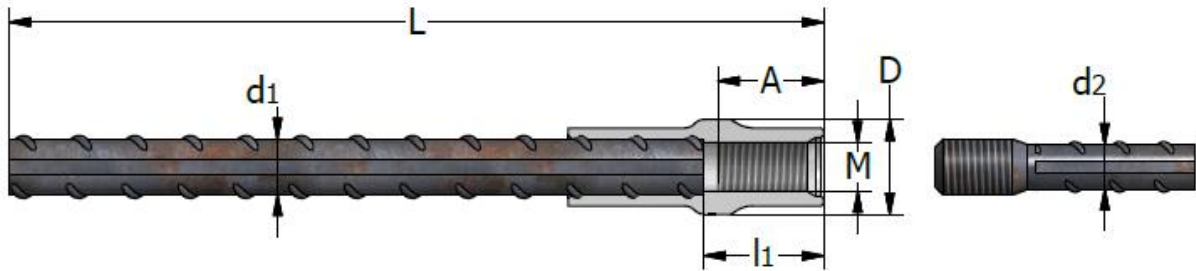

PSA-T Description	Product range no.	Rebar diameter		Sleeve dimensions		
		First rebar d1	Second rebar d2	D	l1	A
		[mm]	[mm]	[mm]	[mm]	[mm]
PSA-T 16/12 - M16 - L	91299	16	12	28	39	25
PSA-T 16/14 - M18 - L	91300	16	14	28	39	32
PSA-T 18/14 - M18 - L	91301	18	14	32	41	32
PSA-T 18/16 - M20 - L	91302	18	16	32	41	38
PSA-T 20/16 - M20 - L	91303	20	16	34	43	38
PSA-T 20/18 - M22 - L	91304	20	18	34	43	40
PSA-T 22/14 - M18 - L	91305	22	14	38	49	32
PSA-T 22/16 - M20 - L	91306	22	16	38	49	38
PSA-T 22/20 - M24 - L	91307	22	20	38	49	42
PSA-T 25/14 - M18 - L	91308	25	14	42.5	53	32
PSA-T 25/16 - M20 - L	91309	25	16	42.5	53	38
PSA-T 25/20 - M24 - L	91310	25	20	42.5	53	42
PSA-T 28/16 - M20 - L	91311	28	16	50	56	38
PSA-T 28/20 - M24 - L	91312	28	20	50	56	42
PSA-T 28/22 - M27 - L	91382	28	22	50	56	45
PSA-T 28/25 - M30 - L	91313	28	25	50	56	52
PSA-T 32/20 - M24 - L	91314	32	20	56	75	42
PSA-T 32/25 - M30 - L	91315	32	25	56	75	52
PSA-T 32/28 - M36 - L	91316	32	28	56	75	56
PSA-T 40/25 - M30 - L	91317	40	25	67	97	52
PSA-T 40/28 - M36 - L	91318	40	28	67	97	56
PSA-T 40/32 - M42 - L	91319	40	32	67	97	65

CONTACT



TERWA is the global supplier for precast and construction solutions with multiple offices around the world. With all our staff, partners and agents, we are happy to provide all construction and precast companies who work in the building industry with full service and 100% support.

TERWA CONSTRUCTION GROUP

Terwa Construction Netherlands (HQ)

Global Sales & Distribution
Kamerlingh Onneslaan 1-3
3401 MZ IJsselstein
The Netherlands
T +31-(0)30 699 13 29
F +31-(0)30 220 10 77
E info@terwa.com

Terwa Construction Central East Europe

Sales & Distribution
Strada Sânzieni
507075 Ghimbav
Romania
T +40 372 611 576
E info@terwa.com

Terwa Construction Poland

Sales & Distribution
Ul. Cicha 5 lok. 4
00-353 Warszawa
Poland
E info@terwa.com

Terwa Construction India & Middle East

Sales & Distribution
India
T +91 89 687 000 41
E info@terwa.com

Terwa Construction China

Sales & distribution
5F 504, No. 101 Chuanchang road
PRC, 200032, Shanghai
China
E info@terwa.com

ALL SPECIFICATIONS CAN BE CHANGED WITHOUT PREVIOUS NOTICE.

DISCLAIMER

Terwa B.V. is not liable for deviations due to wear of the products it has delivered. Neither is Terwa B.V. liable for damage due to inaccurate and/or improper handling and use of the products it has delivered and/or use of same for purposes other than those intended.

Terwa B.V.'s responsibility is furthermore limited in accordance with article 13 of the "Metaalunie" conditions, which are applicable for all Terwa B.V. deliveries. The user is responsible for ensuring compliance with all applicable copyright laws. Without limiting the rights under copyright, no part of this documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of Terwa B.V.